


Anglian Water Green Bond

Featured Project

COTTINGHAM CORBY BURST MAIN



14 bursts in last 6 years
 Low pressure and Interruptions to over
 70 properties
 12S Seconds saves: 1.8

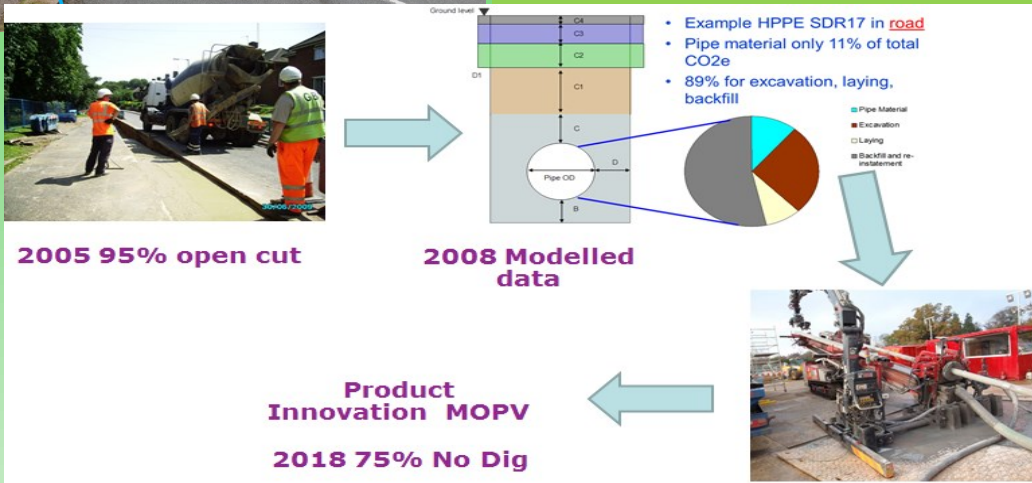

- Total project spend £707k
- Total carbon saving 78%
- Total water saving 90%
- Innovative "no dig" approach
 - (30%) 300m of 90mm Opencut
 - (21%) 210m of 90mm Pipebursting
 - (17%) 165m of 125mm Sliplining

